





Dimensions

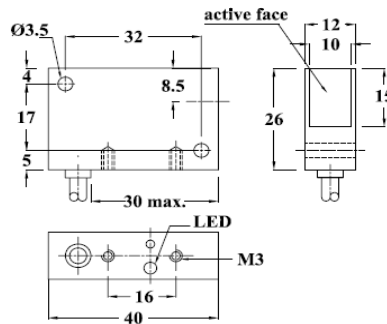

Dimensions

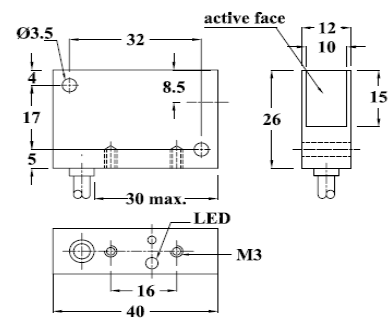

Technical Data

Model	PES-P50-P212L PES-P50-P212N	PES-P50-P222L
General Specifications		
Type	Diffused	Diffused
Switching Output	PNP, Light Sensing PNP,dark sensing	NPN, Light Sensing
Rated Operating Distance	S_n 200 mm ± 10%	200 mm ± 10%
Nominal Ratings		
Supply Voltage	U_e 10-30 Vdc	10-30 Vdc
Frequency of Operating cycle	f 500 Hz	500 Hz
Hysteresis/Differential travel	H <10%	<10%
Rated operating current	I_e 200 mA	200 mA
No-load supply current	I_o < 20 mA	< 20 mA
Voltage drop	U_d < 2.2Vdc	< 2.2Vdc
OFF state current	I_r < 0.1mA	< 0.1mA
Rated insulation voltage	U_i 75 Vdc	75 Vdc
Utilization category	DC-13	DC-13
Permissible Ambient light	3000Lux.	3000Lux.
Protection Circuit	Short circuit & Polarity reversal	Short circuit & Polarity reversal
Function Indication	Red LED - Output, Green LED - Stability	Red LED - Output, Green LED - Stability
Ambient Conditions		
Operating temperature	-5° C to +55° C	-5° C to +55° C
Mechanical Specifications		
Housing Material	Plastic ABS	Plastic ABS
Size	26x40x12 mm	26x40x12 mm
Degree of protection	IP54	IP54
Connection	Cable PVC, 3 Core - 3 mtrs	Cable PVC, 3 Core - 3 mtrs
Core Size	22 AWG	22 AWG
Compliance with Standards and Directives		
Standards Conformity	EN 60947- 5-2	EN 60947- 5-2
Approval	CE	CE