


Dimensions

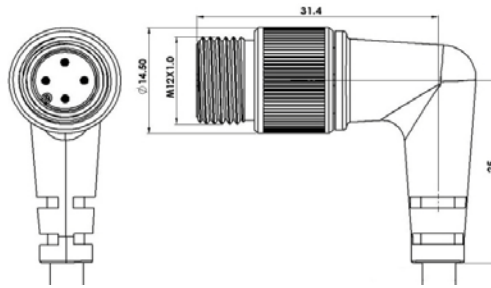


Technical Data

	Model	CSA-DB-PXAX	CSA-DD-PXAX
<b>Electrical Data</b>			
Operating Voltage	$U_B$	250VAC/DC	250VAC/DC
Operating Current		2A	2A
Cable		3C x 0.34 Sq.mm	4C x 0.34 Sq.mm
<b>Ambient Conditions</b>			
Operating Temperature		-20° C to +70° C	-20° C to +70° C
<b>Mechanical data</b>			
Degree of protection		IP 67	IP 67
Orientation		Right Angle	Right Angle
Bending Radius		Min 10 x Dia	Min 10 x Dia
Cable Diameter		4.3 (0.17)mm (in.)	4.8 (0.19)mm (in.)
<b>Material</b>			
Contacts		CuZn	CuZn
Contact Surface		Au	Au
Connector Housing		PA 6	PA 6
Coupling Nut		CuZn-Nickel Plated	CuZn-Nickel Plated
Cable Sheath		PVC Grey Colour	PVC Grey Colour
Construction		Standard M12, Male	Standard M12, Male

Electrical Connection

Non-Shielded 3 Core

Non-Shielded 4 Core



Pin Out



• Standard Cable Lengths of 2m, 5m and 10 m are available. Others on request.