


Dimensions

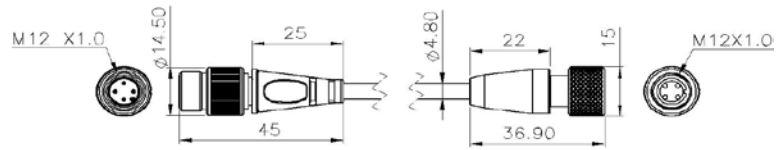

Technical Data

	Model	CSB-CCDC-PXAX
<b>Electrical Data</b>		
Operating Voltage	<b>U<sub>b</sub></b>	250VAC/DC
Operating Current		2A
Cable		4C x 0.34 Sq.mm
<b>Ambient Conditions</b>		
Operating Temperature		-20° C to +70° C
<b>Mechanical data</b>		
Degree of protection		IP 67
Orientation		Straight
Bending Radius		Min 10 x Dia
Cable Diameter		4.8 (0.19)mm (in.)
<b>Material</b>		
Contacts		CuZn
Contact Surface		Au
Connector Housing		PA 6
Coupling Nut		CuZn-Nickel Plated
Cable Sheath		PVC Grey Colour
Construction		Standard M12, (Both ends)

Electrical Connection

Non-Shielded 4 Core

Pin Out

- Standard Cable Lengths of 2m, 5m and 10 m are available. Others on request.